

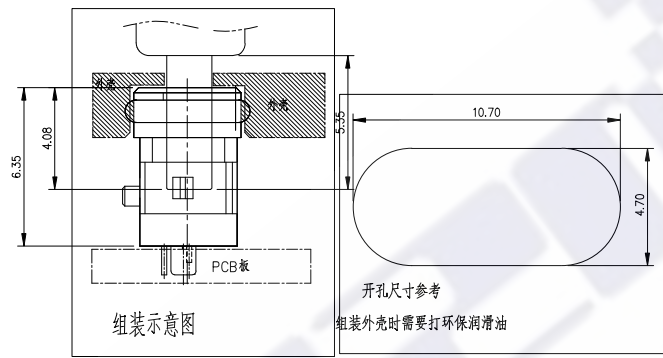
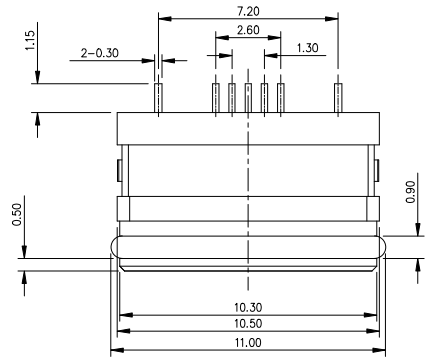
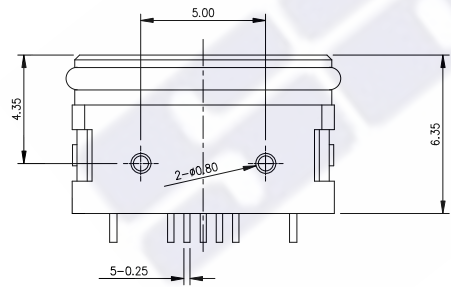
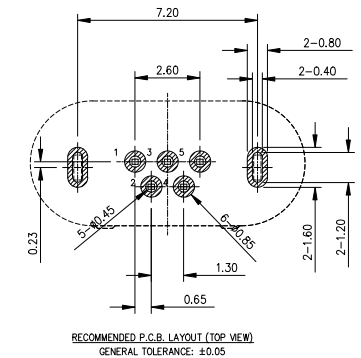



REV.	ECN. NO.	APPD.



Contact Number	Signal Name	Remarks
1#	VBUS	Power
2#	D-	Date-
3#	D+	Date+
4#	ID	Reserve or Ground
5#	GND	Ground

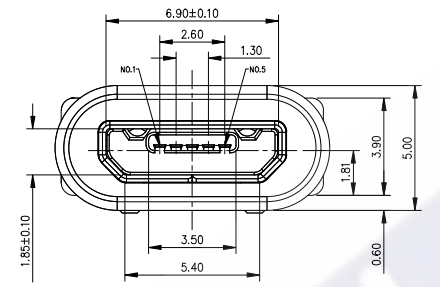

- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - RATING: 1.5A
 - CONTACT RESISTANCE: 30 mΩ MAX.(INITIAL);
 - DIELECTRIC WITHSTANDING: 500V AC MIN.;
 - INSULATION RESISTANCE: 1000MΩ MIN.;
 - DURABILITY: 5,000 CYCLES MIN.;
 - INSERTION FORCE: 3.5Kgf (35N) Max.;
 - EXTRACTION FORCE: 0.8Kgf (8N) Min.;
 - WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7
 - PLUG INTERFACE DIMENSIONS COMFORM TO USB2.0 SPEC.
 - PACKAGING: TAPE & REEL.

ITEM	PART NAME	Q'TY	FINISH	NOTE
5	硅橡胶	1	BLACK	
4	Shell	1	SUS304R-1/2H Ni Plating T=0.30mm	
3	Contact	5	Phosphor bronze C5191R-EH Au/Ni Plating T=0.20mm	
1	Housing	1	PA9T&LCP (G.F30%)	

X. ± 0.50	X.' ± 2'	UNITS mm	三佐部品【中国】股份有限公司		
.X ± 0.30	.X' ± 1'				
.XX ± 0.20	.XX' ± 0.5'	MAT'L	PART NO.	TITLE:	
.XXX ± 0.05			MTKBF05ED1DDWNPP	Micro USB 5Pin DIP (B) Type	
The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts.		FINISH	APPD: RADOM	DWG NO.:	
			CHKD: MARK	MTKBF05ED1DDWNPP IPX7	
		Q'TY	DR: Steven.Rao 2016/08/08	SCALE	SHEET
			1/1	1/1	A1